

























DIAGNOSTICS

SUPPORTED









KFY FFATURES

- Ultra HD 4K Video Transmission (upto 340Mhz), 1080p, 3D
- 4x HDMI Inputs
- 4x HDBaseT™ Class B (Lite) Outputs
- · HDMI-CEC Bi-Directional Control
- · Bi-Directional IR Control
- Responsive Web Interface
- Automatic EDID Management
- Three year standard warranty





With MatrixOS you can control your matrix from any mobile device that is connected to the same network, simply by visiting www.gotomymatrix.com

COMPATIBLE DRIVERS









MATRIXOS

At the core of neo is MatrixOS the beating heart of our 340Mhz video processing unit. Providing you with instant access to all of your connected source devices in stunning Ultra HD 4K, 1080p or 3D. This powerhouse helps to create a "just works" solution, from dynamically generating EDIDs (to ensure the best video quality to every TV) right through to handling software updates for the HDBaseT link. With one goal in mind. Giving you the best possible video distribution system in the world.

CONTEXTUAL IR


4 in, 4 out, that's 16 possible combinations of your video. Historically matrixes have offered remotes with 8 or 16 buttons, requiring multiple presses to get video to the TV your watching. We thought this was an odd solution, given you already known which room you are in, so should the matrix! Our designers did away with this old concept and instead created Contextual IR, this reduces the number of buttons to just 4, one for each possible input. Whatever room your in, select 1, 2, 3, 4 and watch that source instantly.

WEB INTERFACE

We want to give you the best experience possible, to do this, we think it's important you can access neo from any device, be it mobile, tablet or desktop PC and in any browser. We've done this with our responsive design, so it works with you and not the other way round. Our web interface is built directly on top of our REST/API, this means that whatever you can do on your phone, you can get your control system to do also and vice versa. There are no hidden tricks or special codes that require a magic moon dance to work. All of our documentation is free and available on our monitoring site.

MONITORING


It's important that you get video all the time, to help us do that every neo professional matrix keeps in contact with our cloud management service. You can tell if this is working with the Monitored LED on the front of the matrix. If you get stuck, your installer or yourself can log into our cloud portal and see helpful diagnosis information (if you let them), fix problems remotely or tell you where you may have gone wrong in the installation. All of this is free of charge. If neo has a problem, we get alerted too and we can get in contact to arrange a hardware replacement or give you a step by step guide to get you up and running again.

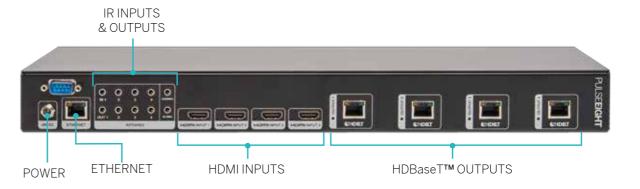

neo:4 BASIC MATRIX

Input 4× HDMI Control 1x Ethernet (IP Control Port) 4× IR Receiver 1x RS232 4× HDBaseT™ Class B (Lite) Output Dimensions (W) 43 cm / (H) 4.5 cm / (D) 14 cm

2x HDMI (Mirrored) Weight 2.05 kg 4× IR Fmitter

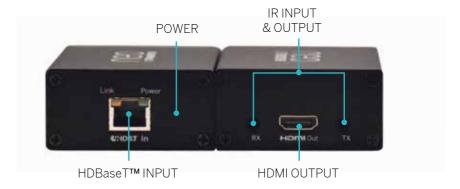

neo:LITE HDBaseT™ RECEIVERS

Input 1x HDBaseT™ Class B (Lite) Dimensions (W) 43 cm / (H) 4.5 cm / (D) 14 cm

1x IR Receiver

Weight 2.05 kg 1x HDMI Output

1x IR Emitter

IN THE BOX

neo:4 Basic Chassis Country Specific Power Cord

P8-HDBT-L-RX-S 4x neo:Lite Receiver P8-IRPACK 4x Infrared Blaster Cable Pack

Rack Mounting Kit Installation Guide

48V External Power Supply with locking connector P8-4REMOTE Context Sensitive 4 Button IR Remote

+44 (0)1202 413610 pulse-eight.com/neo

TECHNICAL DATA

Dimensions (WxHxD):	43 cm / 4.5 cm / 14 cm
Weight:	2.05kg
Material:	Smooth textured powder coated steel
Operating Temperature Range:	0 to +35°C (32 to +95°F)
Operating Humidity Range:	5 to 90 % RH (no condensation)
Power Supply:	Captive locking DC jack - 48V @ 2.5Amps
Power Consumption:	120W
Video Input:	4× HDMI 1.4
Clock Speed:	Input: 340Mhz, Output: 340Mhz
Video Output:	4x HDBaseT Class B (Lite)
Colour Supported:	4K/24bit, 1080p/36bit
3D Supported:	Up to 1080/24p - Frame packing/sequential (Blu-ray), Interlaced stereoscopic (satellite/cable broadcasts)
Encryption:	HDCP
Supported Video Resolutions:	720p, 1080i, 1080p (+3D)
Supported Audio Formats:	PCM 2.0, LPCM 2.0, LPCM 5.1, LPCM 6.1, LPCM 7.1, Dolby Digital 2.0, Dolby Digital 5.1, Dolby Digital EX 6.1, Dolby Digital Plus 7.1, Dolby TrueHD 5.1, Dolby TrueHD 7.1, Dolby Atmos 5.1.2, Dolby Atmos 5.1.4, Dolby Atmos 7.1.2, Dolby Atmos 7.1.4, Dolby Atmos 9.1.2, DTS 5.1, DTS-HD Master 5.1, DTS-HD Master 7.1, DTS 96/24 5.1, DTS-ES Discrete 6.1, DTS-ES Matrix 6.1
ESD Protection:	± 8kV (Air-gap discharge) ± 4 kV (Contact discharge)
Surge Protection:	IEC 61000-4-4 (EFT) 40A (5/50ns) IEC 61000-4-5 (Lightning) 25A (8/20μs)
Certification:	CE, FCC, RoHS

PULSE-EIGHT RESERVES THE RIGHT TO CHANGE PRODUCTS, INFORMATION AND SPECIFICATIONS WITHOUT NOTICE.

Products and specifications discussed herein are for reference purposes only. All information discussed herein is provided on an "AS IS" basis, without warranties of any kind. This document and all information discussed herein remain the sole and exclusive property of Pulse-Eight Limited. No license of any patent, copyright, mask work, trademark or any other intellectual property right is granted by one party to the other party under this document, by implication, estoppel or otherwise. Pulse-Eight products are not intended for use in life support, critical care, medical, safety equipment, or similar applications where product failure could result in loss of life or personal or physical harm, or any military or defence application, or any governmental procurement to which special terms or provisions may apply. All brand names, trademarks and registered trademarks belong to their respective owners.

© 2017 Pulse-Eight Limited. All rights reserved.

