Mobius 3

Developer Series Invisible Loudspeaker

DATASHEET Rev. 1.1 | 01-10-19 | E&OE



Product Description


New to the Mobius range of fully-covered loudspeakers, the Mobius3 offers a smaller, low-cost alternative to the Mobius5 and 7 for use when there is limited stud/joist spacing, or in larger projects such as multi-dwelling units. The Mobius3 can also be used to supplement Mobius speakers within a large project, providing a cost-effective solution for lesser rooms such as spare bedrooms or hallways.

Rendered invisible behind a 2mm skim of plaster or other materials, the Mobius3 uses the same OptiDriver and OptiDamping technology found on the flagship Mobius7i invisible loudspeakers. Paired with a subwoofer the Mobius3 can be used for medium-level, full-bandwidth music listening at a highly competitive price point.

Example Applications

Invisible audio installations with space limitations. Distributed audio and medium-level listening within residential properties such as MDU's. Costsensitive commercial background music applications.

Frequency Response

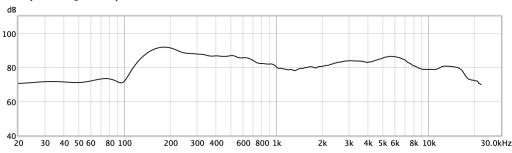

The state of the s

Specifications

Mobuis3

Nominal impedance	8 Ohms
Power handling (100 hour continuous/peak)	30 W/60 W
Sensitivity (2mm plaster/mud skim)	84dB1m/2.83Vrms
Frequency response	112Hz - 20kHz (- 6db)
Dispersion angle	180° x 180° (H x V)
Electrical connection	Blue butt-splice crimp terminals (14-16 AWG)
Dimensions	400mm x 300mm x 35mm (15 ^{3/4} " x 11 ^{13/16} " x 1 ^{3/8} ")
Product weight	1.1Kg (2lbs 6oz)
Fixing requirements	BackboxCV300/SW300 or Mounting Blocks
In-line protection unit	APUi30C, APU-RS8iC or APU-RS16iC
Manufacturer limited residential warranty	10 years